



Key Features

Enhanced Touchscreen Performance | Immersive Stereo Sound |
myViewBoard™ Annotation Software | ViewBoard Cast Content Sharing
Software | SmartPort USB™



Product Description

This item has been discontinued. Please see our replacement sku [here](#).
Featuring 4K Ultra HD resolution and an advanced, next-generation touchscreen, the ViewSonic® ViewBoard® IFP7550 delivers incredible collaborative capabilities for 21st century boardrooms and classrooms. With integrated myViewBoard® annotation software and ViewBoard Cast streaming software, content creation and sharing has never been easier. What’s more, this ENERGY STAR certified display delivers optional slot-in PC capability for more computing-intensive interactive applications. A VESA-compatible design allows for installation on a wall mount, or on an optional trolley cart for more flexible installation in classrooms and meeting rooms.

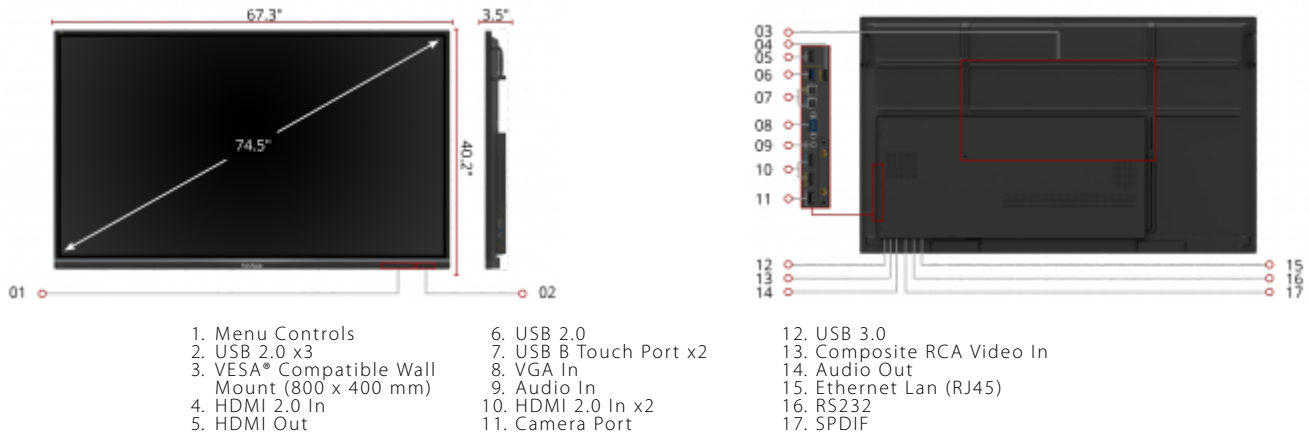

75"
DISPLAY

RESOLUTION

20-Point
TOUCH INTERACTIVE

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:	
Display Size (in.):	75
Viewable Area (in.):	74.5
Light Source:	LED
Resolution:	3840 x 2160
Refresh Rate (Hz):	60
Aspect Ratio:	16:9
Static Contrast Ratio:	1,200:1
Backlight Life (Hours):	50,000
Brightness:	350 cd/m2
Response Time (Typical GTG):	8ms
Viewing Angles:	178° horizontal, 178° vertical
Panel Surface:	9H
Operation Rating:	16/7
Networking:	
Ethernet LAN:	10/100/1000 Mbps
Embedded Player:	
OS:	ViewBoard OS (embedded Android 7)
GPU:	ARM Mali450 Quad Core
CPU:	ARM Dual Core Cortex A73
CPU Processor Speed:	1.2GHz
Memory:	2GB
Storage:	16GB
Built-in Software:	myViewBoard, Chromium browser, Zoom, ViewBoard Cast
Audio:	
Internal Speakers:	10W (x2)
Subwoofer:	15W (x1)
Connector:	
HDMI 2.0 In(3), HDMI Out(1), VGA(1), Composite RCA(1), 3.5mm Audio In(1), 3.5mm Audio Out(1), SPDIF Audio Out(1), USB 3.0(2), USB 2.0(4), Slot-in PC Slot(1), USB B Touch Port(2), RS232(1), Ethernet LAN (RJ45)(1), WIFI Module Slot(1)	
Power:	
Voltage:	100-240 VAC
Consumption (max):	350W
Consumption (typical):	138W
Stand-by:	<0.5W
Controls:	
On Screen Display:	Input, Volume, Backlight, Audio, Screen, Display, Adjust
Remote Control:	Volume, Channel, Source, Mute, Back, Input, Menu
Operating Conditions:	
Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	10-90%
Touch:	
Touch Technology:	Infrared
Touch Points:	20-Point Touch
Tip Detection:	Dual tips, 3mm and 8mm

Weight (imperial):	
Net (lbs):	116.8
Gross (lbs):	143.3
Weight (metric):	
Net (kg):	53.0
Gross (kg):	65.0
Dimensions (imperial) (WxHxD):	
Packaging (in.):	76.0 x 44.9 x 11.0
Physical (in.):	67.3 x 40.2 x 3.5
Dimensions (metric) (WxHxD):	
Packaging (mm):	1930.0 x 1140.0 x 280.0
Physical (mm):	1710.0 x 1020.0 x 90.0
Mount:	
VESA Compatible:	800 x 400 mm
Additional Hardware:	
Camera Mounting Bracket:	1

General:	
Warranty: 3-year limited warranty on parts, labor and backlight, onsite warranty	
Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.	
PACKAGE CONTENTS: IFP7550 display, stylus pen x 2, power cable, HDMI cable, USB cable, AV cable, remote control with batteries, Camera plate, M8 screw x 8, Quick Start Guide	
Regulations: cTUVus, FCC, ENERGY STAR, Mexico Energy, CE, CB, RoHS, ErP, WEEE	
UPC: 766907901610	

Accessories:	
Intel Unite, LB-PEN-002, LB-WIFI-001, NMP660, PD-IFP-001, PD-IFP-002, PD-IFP-003, PD-IFP-004, SW-071, SW-072, SW-072-2, SW-073, SW-073-2, SW-074, SW-074-2, SW-075, SW-075-2, SW-101, SW-UP-117, VB-BLF-001, VB-BLF-002, VB-BLF-003, VB-BLM-001, VB-BLM-002, VB-BLM-003, VB-BLM-004, VB-BLW-001, VB-BLW-002, VB-BLW-003, VB-BLW-004, VB-BWS-002, VB-BWS-005, VB-CAM-001, VB-EBL-001, VB-EBM-001, VB-EB5-001, VB-EBT-001, VB-EBV-001, VB-EBV-002, VB-EBW-001, VB-PEN-002, VB-STND-001, VB-STND-002, VB-STND-003, VB-STND-004, VB-STND-005, VB-VIS-001, VB-WKB-001, VBD100, VBH100, VBS100, VPC15-WP-4, VPC15-WP-6, VPC16-WP-4, VPC17-WP-6, VPC17-WP-6-S, VPC25-W33-P1, VPC25-W53-P2, VPC27-W55-P2, WMK-047-2	

Awards:	
	