


# Bragi CinemaScope

Using Barco's renowned Pulse electronic and software platform, Bragi CinemaScope is powered by a revolutionary, new, high lumens density (HLD) RGB LED light engine.

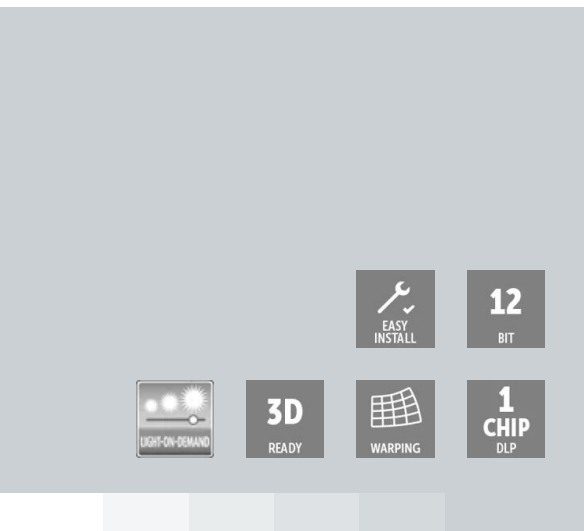

- Theater Series
- 5K UHD Resolution (5,120 x 2,160)
- Solid State RGB LED
- Up to 2,200 ANSI Lumens

Bragi takes its name from an historical ninth-century poet. His poems were so outstandingly artful and moving that subsequent generations imagined that, upon his death, Odin had appointed him the court poet of Valhalla.

Bragi, being Balder's brother and inherits the same design philosophy, optical core and lenses.

## Professional grade optics

By basing Bragi CinemaScope's optical engine on its bigger brother Balder CinemaScope's architecture, incorporating custom designed aspherical glass elements and enhanced low dispersion glass lenses, image quality is in a class of its own.

Topping that, Bragi's chassis and core are built from aluminium and magnesium, which offer exceptional robustness, resulting in the best picture quality ever shown at this level.

## State of the art electronics

Thanks to our unique single step processing technology (SSPTM), Pulse electronics are designed to process 4K UHD, HDMI 2.0a, HDCP 2.2 and HDR10 signals with extremely low latency.

Bragi CinemaScope uses the very latest 0.9" DMD DLP chipset, to display flawless 5K UHD (5,120 x 2,160 px), 2.37:1 aspect ratio images on screen.

## CinemaScope

Our unique aspect ratio detection system, automatically crops and scales



content to fit the appropriate screen area, ranging from 1.78:1 to 2.39:1.

Manual cropping is also available for custom configurations such as cinemascope subtitle support, where only the top black bar (letterboxing) is removed, preserving the subtitles at the foot of the image.

### Colors

Combining HLD LED illumination with regular LED colors which appear more saturated, the human eye is tricked to interpret this as richer, brighter colors than they are physically measured. Bragi also includes a motorized DCI/P3 filter for improved HDR color accuracy.

Additionally, Barco's RealColor processing enables simple and accurate calibration to your desired color gamut or white point.

## Product specifications

## BRAGI CINEMASCOPE

General specifications	
Projector type	Single chip DLP
Technology	0.9" DMD™
Resolution	5,120 x 2,160 (5K UHD)
Aspect ratio	2.37:1 (CinemaScope)
Light source	Solid State RGB LED
Light source lifetime	Up to 50,000 hours * Brightness mode dependent
Light output	Up to 2,200 ANSI Lumens
CLO (constant light output)	Yes
Contrast ratio	1,800:1 Sequential 450:1 ANSI
Brightness uniformity	>90%
Lens range	(R9802232) -EN68 (0.30:1) -Periscope Lens (requires vertical installation) (R9801832) -FLDX UST (0.41:1) -90°ns (R9802244) -EN67 (0.65:1) (R9802243) -EN66 (0.80 - 1.21:1) (R9802003) -EN76 (0.95 - 1.30:1) (R9802242) -EN63 (1.20 - 1.70:1) * (R9802241) -EN61 (1.70 - 2.50:1) * (R9801211) -EN44 (2.50 - 4.60:1)  * Standard Lens Option(s)
Optical lens shift	Up to 122% vertical lens shift & up to 40% horizontal lens shift (depending on lens selection)  Visit the Barco Residential Lens Calculator for further information <a href="#">Download Lens &amp; Airflow Data Here</a>
Optical dowser	Yes
Color correction	P7 RealColor™
Color gamut	REC.709 DCI (P3) via internal filter
Image processing	Embedded Warp & Blend Engine
WARP	4-Corner Warp & Bow Correction via Warp Engine
Orientation	360° Rotation
Network connection	10/100 Ethernet via RJ45 connection
Integrated web server	Yes
Diagnostics	via Prospector web interface
HDR	HDR10
3D	Active Stereoscopic 3D Additional hardware required please contact an authorized Barco representative for details
Inputs	1 x HDMI 2.0 (HDCP 2.2) 1 x HDBaseT (HDCP 1.4 -9Gbps only) 2 x Dual Link DVI-D 2 x Display Port (1.2) 12G-SDI  1 x RJ45 Ethernet 1 x RS232 1 x Remote Control (RC) 3 x USB (2 x Rear, 1 x Front) DMX (1 x Input, 1 x Output)

**Product specifications****BRAGI CINEMASCOPE**

Input resolutions	From VGA up to 4K UHD (3,840 x 2,160) @ 60Hz or up to 2,560 x 1,600 @ 120Hz
Latency	TBD
Control	IR, RS232, IP, 12v Trigger Driver modules available for: Crestron, Control4, RTI & Savant  NOTE: 12v Trigger(s) do not follow standard functionality and require an IP command to enable / disable them. Download our integration guide for more information.
Power requirements	100 -240V / 50 -60Hz
Power consumption	570 W -Max
Noise level (typical at 25°C/77°F)	30 -33 dB(A) Max.
Operating temperature	10 to 45 °C at Sea Level Optimal Set Point: 20 °C
Operational humidity	20 to 80% (relative humidity)
BTU per hour	1,945 BTU/h -Max
Airflow requirements	Air Inlet (from Rear w/Feet Down): Right Side Exhaust (from Rear w/Feet Down): Rear  Clearance Requirements: Front: 1cm Left: 1cm Right: 25cm Rear: 25cm Top: 1cm
Exhaust airflow	58 ft <sup>3</sup> /min @ 22.9 °C 99 m <sup>3</sup> /hour @ 22.9 °C Download Lens & Airflow Data Here
Dimensions (WxLxH)	Excluding Lens 450 x 482 x 255 mm 17.7 x 19 x 10 in.
Weight	Excluding Lens 21.5 kg / 47.4 lbs
Shipping Dimensions	Excluding Lens 464 x 679 x 773 mm 18.27 x 26.7 x 30.4 in
Shipping weight	TBC
Standard accessories	Power Cord, Remote Control
Certifications	CE, FCC Class A and cCSAus
Warranty	Limited 3 years parts and labor Extendable up to 5 years
24/7 operation	This projector is designed and warranted for heavy duty 24/7 operation. Specific measures and design considerations have been made in order for it to comply with stringent requirements in challenging applications.
*	* Service required following 20,000 hours use Please contact an authorized Barco representative for details

**Last updated: 22 Jun 2023**

© 2018 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest specifications.