
# F70-4K8

# 4K UHD laser phosphor projector

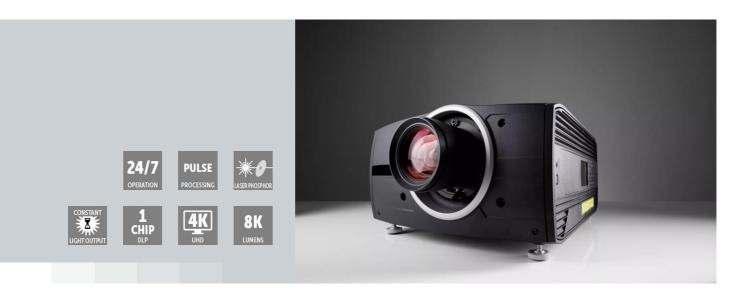

- 4K UHD resolution
- Durable and robust for 24/7 operation
- High brightness
- Long lifetime (up to 60, 000 hours)

The F70-4K8 is a laser phosphor projector with native WQXGA and up to 4K UHD resolution. The F70 series answers to the ProAV market's specific requirements - including high robustness, longer lifetime, and laser-sharp image quality. Projectors that do not meet these demands don't last long or might require frequent and expensive maintenance.

Thanks to its rugged design Barco's F70 is motion platform capable, making it the perfect choice for theme parks, dark rides and the most demanding fixed installations. With a lifetime of up to 60,000 hours (depending on the mode of operation), the F70 is one of the most durable projectors on the market and is ready for service in the most demanding environments.

#### Designed for 24/7 use

The F70 is designed for performance and reliability. Capable of running in any orientation, the F70 projectors offer more installation flexibility. All of Barco's F-series projectors feature the same high-resolution FLD and FLD+ lenses so that you can reuse your lenses.

#### Brighter, better

With brightness levels of 7,500 lumens, the F70-4K8 is one of the brightest single-chip DLP projectors on the market. With the Constant Light Output (CLOTM) functionality, the projector produces constant brightness and color over a long period of time.



## **Product specifications**

## F70-4K8

General specifications	
- General specifications	
Brightness	7,500 lumens
Contrast ratio	1800:1 sequential, 50,000:1 dynamic
IR for NVG	no
Brightness uniformity	90%
Aspect ratio	16:10
Projector type	1DLP laser phosphor
Resolution	3,840 x 2,400 (4K UHD) / 2,560 x 1,600 (native)
Lens type	FLD/FLD+
Optical lens shift	Vertical up to 146%, depending on lens Horizontal up to 70%, depending on lens Motorized zoom and focus (+ lens memory FLDX lenses) Motorized lens shift (with position memory on all lenses)
Color correction	P7 RealColor <sup>TM</sup>
CLO (constant light output)	Yes
Light source	Laser phosphor
Light source lifetime	Up to 60,000 hours, depending on mode of operation
Sealed DLP™ core	Yes
Orientation	360° rotation, no restrictions
3D	Active stereoscopic 3D
Image processing	Embedded warp & blend engine
Keystone correction	Yes
Inputs	HDSDI 2x DP1.2 2x dual link DVI-I HDBaseT HDMI2.0 (HDCP2.2, HDR10) RJ 45 Ethernet DMX in/out RS232 in 2x USB 12v out

(4096 x 2160/ 3860 x 2400)     Input color depth   DVI: Including and up to 2560x1600@60Hz 8 bit RGB and 3840x2400@50Hz 8 bit RGB	Product specifications	F70-4K8
DisplayPort: Including and up to 2560x1600@120Hz 12 bit RGB and 3840x2400@60Hz bit RGB  Software tools  Projector Toolset  Control  IR, RS232, RJ45  Network connection  IR, RS232, RJ45  Power requirements  100-240V / 50-60Hz  Power consumption  1,100 W Max.  BTU per hour  Max 4,000 BTU/h  Noise level (typical at 25°C/77°F)  36 dB(A)  Operating temperature  10 -40 °C (sea level)  Storage temperature  -20 to 60 °C  Operating humidity  20 -80% RH  Storage humidity  10 -90% RH  Dimensions (WxLxH)  475 x 593 x 286 mm (18,7 x 23.3 x 11.2 in)  Weight  37 kg (81.5 lbs)  Standard accessories  Power cord, wireless remote control  Certifications	Input resolutions	3,840 x 2,400 @ 60Hz 3,840 x 2,160 @ 60Hz 4,096 x 2,160 @ 60Hz 2,560 x 1,600 @ 120Hz refresh rates: 24Hz to 120Hz for WQXGA (2560x1600) and 24Hz to 60Hz for 4K/4KUHD
ControlIR, RS232, RJ45Network connectionIR, RS232, RJ45Power requirements100-240V / 50-60HzPower consumption1,100 W Max.BTU per hourMax 4,000 BTU/hNoise level (typical at 25°C/77°F)36 dB(A)Operating temperature10 -40 °C (sea level)Storage temperature-20 to 60 °COperating humidity20 -80% RHStorage humidity10 -90% RHDimensions (WxLxH)475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)Weight37 kg (81,5 lbs)Standard accessoriesPower cord, wireless remote controlCertificationsCE, FCC Class A and cCSAus	Input color depth	DVI: Including and up to 2560x1600@60Hz 8 bit RGB and 3840x2400@50Hz 8 bit RGB DisplayPort: Including and up to 2560x1600@120Hz 12 bit RGB and 3840x2400@60Hz 8 bit RGB
Network connection       IR, RS232, RJ45         Power requirements       100-240V / 50-60Hz         Power consumption       1.100 W Max.         BTU per hour       Max 4,000 BTU/h         Noise level (typical at 25°C/77°F)       36 dB(A)         Operating temperature       10 -40 °C (sea level)         Storage temperature       -20 to 60 °C         Operating humidity       20 -80% RH         Storage humidity       10 -90% RH         Dimensions (WxLxH)       475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)         Weight       37 kg (81,5 lbs)         Standard accessories       Power cord, wireless remote control         Certifications       CE, FCC Class A and cCSAus	Software tools	Projector Toolset
Power requirements  100-240V / 50-60Hz  Power consumption  1,100 W Max.  BTU per hour  Max 4,000 BTU/h  Noise level (typical at 25°C/77°F)  36 dB(A)  Operating temperature  10 -40 °C (sea level)  Storage temperature  -20 to 60 °C  Operating humidity  20 -80% RH  Storage humidity  10 -90% RH  Dimensions (WxLxH)  475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)  Weight  37 kg (81,5 lbs)  Standard accessories  Power cord, wireless remote control  Certifications  CE, FCC Class A and cCSAus	Control	IR, RS232, RJ45
Power consumption 1,100 W Max.  BTU per hour Max 4,000 BTU/h  Noise level (typical at 25°C/77°F) 36 dB(A)  Operating temperature 10 -40 °C (sea level)  Storage temperature -20 to 60 °C  Operating humidity 20 -80% RH  Storage humidity 10 -90% RH  Dimensions (WxLxH) 475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)  Weight 37 kg (81,5 lbs)  Standard accessories Power cord, wireless remote control  Certifications CE, FCC Class A and cCSAus	Network connection	IR, RS232, RJ45
BTU per hour  Max 4,000 BTU/h  Noise level (typical at 25°C/77°F)  36 dB(A)  Operating temperature  10 -40 °C (sea level)  Storage temperature  -20 to 60 °C  Operating humidity  20 -80% RH  Storage humidity  10 -90% RH  Dimensions (WxLxH)  475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)  Weight  37 kg (81,5 lbs)  Standard accessories  Power cord, wireless remote control  Certifications  CE, FCC Class A and cCSAus	Power requirements	100-240V / 50-60Hz
Noise level (typical at 25°C/77°F)  36 dB(A)  Operating temperature  10 -40 °C (sea level)  Storage temperature  -20 to 60 °C  Operating humidity  20 -80% RH  Storage humidity  10 -90% RH  Dimensions (WxLxH)  475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)  Weight  37 kg (81,5 lbs)  Standard accessories  Power cord, wireless remote control  Certifications  CE, FCC Class A and cCSAus	Power consumption	1,100 W Max.
Operating temperature 10 -40 °C (sea level)  Storage temperature -20 to 60 °C  Operating humidity 20 -80% RH  Storage humidity 10 -90% RH  Dimensions (WxLxH) 475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)  Weight 37 kg (81,5 lbs)  Standard accessories Power cord, wireless remote control  Certifications CE, FCC Class A and cCSAus	BTU per hour	Max 4,000 BTU/h
Storage temperature -20 to 60 °C  Operating humidity 20 -80% RH  Storage humidity 10 -90% RH  Dimensions (WxLxH) 475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)  Weight 37 kg (81,5 lbs)  Standard accessories Power cord, wireless remote control  Certifications CE, FCC Class A and cCSAus	Noise level (typical at 25°C/77°F)	36 dB(A)
Operating humidity  20 -80% RH  Storage humidity  10 -90% RH  Dimensions (WxLxH)  475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)  Weight  37 kg (81,5 lbs)  Standard accessories  Power cord, wireless remote control  Certifications  CE, FCC Class A and cCSAus	Operating temperature	10 -40 °C (sea level)
Storage humidity10 -90% RHDimensions (WxLxH)475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)Weight37 kg (81,5 lbs)Standard accessoriesPower cord, wireless remote controlCertificationsCE, FCC Class A and cCSAus	Storage temperature	-20 to 60 °C
Dimensions (WxLxH)     475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)       Weight     37 kg (81,5 lbs)       Standard accessories     Power cord, wireless remote control       Certifications     CE, FCC Class A and cCSAus	Operating humidity	20 -80% RH
Weight     37 kg (81,5 lbs)       Standard accessories     Power cord, wireless remote control       Certifications     CE, FCC Class A and cCSAus	Storage humidity	10 -90% RH
Standard accessories Power cord, wireless remote control  Certifications CE, FCC Class A and cCSAus	Dimensions (WxLxH)	475 x 593 x 286 mm (18,7 x 23,3 x 11,2 in)
Certifications CE, FCC Class A and cCSAus	Weight	37 kg (81,5 lbs)
	Standard accessories	Power cord, wireless remote control
Warranty Limited 5 years parts and labor, extendable	Certifications	CE, FCC Class A and cCSAus
	Warranty	Limited 5 years parts and labor, extendable

#### Last updated: 22 Jun 2023

© 2018 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.

