

# W11000 H

## Home Cinema Projector



### OPTIONAL ACCESSORY




Ceiling Mount: 5JJCY10.001

## Specification

Model	W11000
Projection System	DLP 4K UHD
Resolution	3840 x 2160 with XPR technology
Display Pixels	8.3 million
Brightness	2200 AL
FOFO Contrast Ratio	50,000:1 with Dynamic Iris
Display Colour	1.07 Billion Colours
Lens	f=2.05 f=20.5~30.4
Aspect Ratio	16:9
Throw Ratio	1.37 - 2.06(100" @ 3m)
Image Size (Clear Focus/Maximum)	95"~180"/300"
Zoom Ratio	1.5:1
Lamp Type	PHILIPS 240W E22.7
Lamp Mode (Normal/Eco/SmartEco)*	3000 / 4000 / 6000 hours
Lens Shift	Vertical: ± 65% / Horizontal: ± 27%
Resolution Support	VGA(640x480) to 4K2K_RB(4096x2160) *RB = Reduced Blanking
Horizontal Frequency	15 - 102KHz
Vertical Scan Rate	23 - 120Hz
Colour Wheel Segment	6-Segment (RGBRGB)
Colour Wheel Speed	6x (50Hz), 4x (60Hz)
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p 2560x1200, 3840x2160, 4096x2160 Video Compatibility: NTSC, PAL, SECAM
Vertical Scan Rate	23 - 120Hz
Interface	PC (D-Sub): x 1 HDMI: x 2 (HDMI 1.20 / HDCP 2.0 support x 1) USB (Type mini B) x 1 (Service) LAN x 1 RS232 x 1 DC 12V Trigger x 2 IR Receiver x 2 (Front & Back) IR in x 1
Dimensions (L x W x H)	470.7 x 224.9 x 564.7 mm
Weight	14.8kg
Power Supply	AC100 to 240V, 50 to 60 Hz
Power Consumption	Normal 353W, Eco 290W, Network Standby <6W Standby <0.5W
Audible Noise	26/23 dBA (Normal/Economic mode)
Languages	English/ Spanish/ French (28 Languages)
Picture Mode	** ISF Disabled: Bright / Vivid / Cinema/THX/ Silence/ User 1/ User 2 *** ISF Disabled: Bright / Vivid / Cinema/THX/ Silence/ User 1/ User 2 / ISF Night / ISF Day
Accessories (Standard)	Lens Cover, Remote Control with Battery, Power Cord (by region), User Manual CD, Quick Start Guide, Warranty Card
Accessories (Optional)	Spare Lamp Kit, Ceiling Mount, Anamorphic lens
Environmental Notice	Lamp in this product contains mercury. To dispose of the product or used lamps, consult your local environment authorities for regulations or see <a href="http://www.lamprecycle.org">www.lamprecycle.org</a> .

\* Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice. \*\* Default picture mode is THX. \*\*\* When ISF is enable, default picture mode is ISF Night.

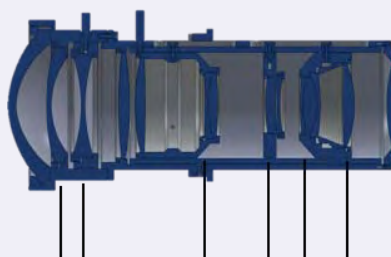

Extra low dispersion glass

### Lens Optimized for 4K Images

- 4K lens featuring 14-piece lens in six grouping structure
- 6-piece extra low dispersion coating glass lens

Greater Light Penetration to provide 4K details with Best Color, Clarity & Sharpness



Dealer's Stamp

HCC/AIM  
Free Call (AU)  
1800 008899  
[homecinemacentral.com.au](http://homecinemacentral.com.au)

