


Key Features

- 2nd generation laser phosphor technology with up to 30,000 hours lifespan
- 4,200 ANSI Lumens offering bright images in any environment
- Up to 300" ultra large screen that is easily installed and set up
- 0.49 short throw for immersive edge blending without any shadows
- Installation flexibility: H/V keystone, 4 corner adjustment, 360° projection and portrait mode



Product **Description**

The Luminous Superior series is ViewSonic's lamp-free high brightness projector for both business and education. The LS710HD adopts industry-leading 2nd generation laser phosphor technology, delivers 4,200 ANSI Lumens while eliminating the use of toxic mercury, reducing the cost and effort of frequent lamp replacement and lowering total cost of ownership. The lamp-free light source offers enhanced sustainability for a greener environment while delivering clear and bright images with vivid colors and 1080p resolution. Boasting short throw ratio, flexible installation and easy image adjustments, the projector enables effortless edge blending to create an immersive experience for any space, be it a restaurant, gym, gallery, etc. With 0.49 short throw ratio, the projector can provide 100" large screen size from only 1.1 m away without being bothered by the shadows. The LS710HD allows perfectly-shaped images even from an angled projection with H/V keystone and 4 corner correction and offers versatile application with 360° projection and portrait mode. The projector also comes with HDMI 2.0b, ensuring you access to original 4K quality content with HDR/HLG support.

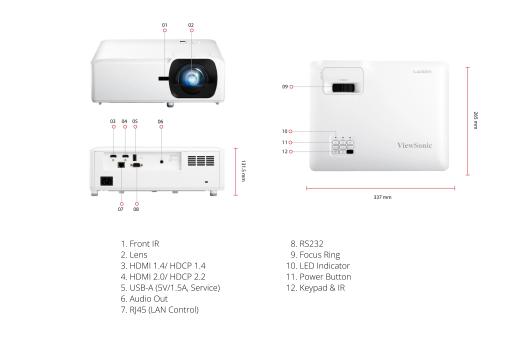

Brightness:4200 (ANSI Lumens)Power Supply Voltage:50Contrast Ratio:300000:1Power Consumption:NDisplay Color:1.07 Billion ColorsOperating Temperature:OLight Source Type:Laser PhosphorCarton:BLight Source Life (hours) with SuperEco Mode:30000 (Eco)Gross Weight:4Light Source Life (hours) with SuperEco Mode:30000 (Eco)Dimensions (WxDxH) with Adjustment Foot:3Projection Offset:132%+/-5%Packing Dimensions:4Throw Ratio:0.49ESS	00-240V+/- 10%, 0/60Hz AC in) Jormal: 245W Standby: <0.5W -40°C Brown .5kg .6kg .37x265x131.5mm 96x195x387mm English, French, German, Spanish, Italian, Portuguese, Dutch, Swedish, Finnish, Greek, Jorwegian/Danish, Oreek, Jorwegian/Danish, Stasian
Brightness:4200 (ANSI Lumens)Attraction (AContrast Ratio:300000:1Power Consumption:NDisplay Color:1.07 Billion ColorsOperating Temperature:OLight Source Type:Laser PhosphorCarton:BLight Source Life (hours) with SuperEco Mode:20000Ret Weight:4Light Source Life (hours) with SuperEco Mode:30000 (Eco)Gross Weight:6Lens:F=2.8, f=7.51mmDimensions (WxDxH) with Adjustment Foot:33Projection Offset:132%+/-5%Packing Dimensions:44Throw Ratio:0.49ES	AC in) AC in) Jormal: 245W Standby: <0.5W ~40°C Brown .5kg .6kg .37x265x131.5mm 96x195x387mm english, French, German, panish, Italian, Portuguese, Dutch, Swedish, Finnish, Greek, Jorwegian/Danish, Greek,
Display Color:1.07 Billion ColorsOperating Temperature:OLight Source Type:Laser PhosphorCarton:BLight Source Life (hours) with Normal Mode:20000Net Weight:4Light Source Life (hours) with SuperEco Mode:30000 (Eco)Gross Weight:6Lens:F=2.8, f=7.51mmDimensions (WxDxH) with Adjustment Foot:33Projection Offset:132%+/-5%Packing Dimensions:44Throw Ratio:0.49ES	Standby: <0.5W A~40°C Brown .5kg .6kg .37x265x131.5mm 96x195x387mm Singlish, French, German, Spanish, Italian, Portuguese, Dutch, Swedish, Finnish, Greek, Jorwegian/Danish,
Display Color:1.07 Billion ColorsLight Source Type:Laser PhosphorLight Source Life (hours) with Normal Mode:20000Light Source Life (hours) with SuperEco Mode:20000Light Source Life (hours) with SuperEco Mode:30000 (Eco)Lens:F=2.8, f=7.51mmProjection Offset:132%+/-5%Projection Offset:0.49Cartor:Same Source So	-40°C Brown .5kg .6kg .37x265x131.5mm 96x195x387mm Binglish, French, German, Spanish, Italian, Portuguese, Dutch, Swedish, Finnish, Greek, Jorwegian/Danish,
Light Source Type:Laser PhosphorCarton:BLight Source Life (hours) with Normal Mode:20000Net Weight:4Light Source Life (hours) with SuperEco Mode:30000 (Eco)Gross Weight:6Lens:F=2.8, f=7.51mmDimensions (WxDxH) with Adjustment Foot:33Projection Offset:132%+/-5%Packing Dimensions:44Throw Ratio:0.49SS	Brown 5kg 6kg 37x265x131.5mm
Light Source Life (hours) with Normal Mode:20000Net Weight:4Light Source Life (hours) with SuperEco Mode:30000 (Eco)Gross Weight:6Lens:F=2.8, f=7.51mmDimensions (WxDxH) with Adjustment Foot:33Projection Offset:132%+/-5%Packing Dimensions:44Throw Ratio:0.49ES	5kg 6kg .37x265x131.5mm .96x195x387mm
SuperEco Mode: 30000 (Eco) Dimensions (WxDxH) with Adjustment Foot: 30000 Lens: F=2.8, f=7.51mm Dimensions (WxDxH) with Adjustment Foot: 30000 Projection Offset: 132%+/-5% Packing Dimensions: 40000 Throw Ratio: 0.49 S S	37x265x131.5mm 96x195x387mm English, French, German, Spanish, Italian, Portuguese, Dutch, Swedish, Finnish, Greek, Jorwegian/Danish,
Lens: F=2.8, f=7.51mm Adjustment Foot: 3. Projection Offset: 132%+/-5% Packing Dimensions: 4 Throw Ratio: 0.49 E South All South All South All	96x195x387mm English, French, German, Spanish, Italian, Portuguese, Dutch, Swedish, Finnish, Greek, Jorwegian/Danish,
Throw Ratio: 0.49 E	nglish, French, German, Spanish, Italian, Portuguese, Dutch, Swedish, Finnish, Greek, Iorwegian/Danish,
S	Spanish, Italian, Portuguese, Dutch, Swedish, Finnish, Greek, Iorwegian/Danish,
	Portuguese, Dutch, Swedish, Finnish, Greek, Iorwegian/Danish,
	lorwegian/Danish,
P	Polish, Russian, Simplified_Chinese, Traditional_Chinese, Korean, Arabic, Japanese, Thai,
Throw Distance: 0.43-3.25m OSD Language: K	
Keystone: H:+/_15° \/:+/_15° H	lungarian, Szechoslovak,
Audible Noise (Normal): 32dB	Turkish, Farsi. Vietnamese, Indonesian, Romanian, Slovakian, total 27 languages
Audible Noise (Eco): 29dB R	
Input Lag: 49.9ms	English, S-Chinese, T-
Kesolution Support: VGA(640 x 480) to 4K UHD(3840 x 2160) C	Chinese, Indonesian, Finish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages
480i, 480p, 576i, 576p, User Guide Language: P HDTV Compatibility: 720p, 1080i, 1080p, 4K User Guide Language: P UHD S	
Horizontal Frequency: 15K-102KHz T	
Vertical Scan Rate: 23-120Hz STANDARD ACCESSORY	o languages
INPUT Power Cord: 1	
2 HDMI: (HDMI 2.0/ HDCP 2.2 HDMI 1.4/ HDCP 1.4) Remote Control: 1	
OUTPUT	′es
Audio-out (3.5mm): 1 Warranty Card: Ye	'es (CN Only)
Speaker: 15W x2 OPTIONAL ACCESSORY	
USB Type A (Power): 1 (5V/1.5A) Wall/Ceiling Mount: P	PJ-WMK-007
CONTROL	
RS232 (DB 9-pin male): 1	
RJ45 (LAN control): 1	
USB Type A (Services): (share with USB A Output)	